



EXAMPLE OF WINDOW CONFIGURATION

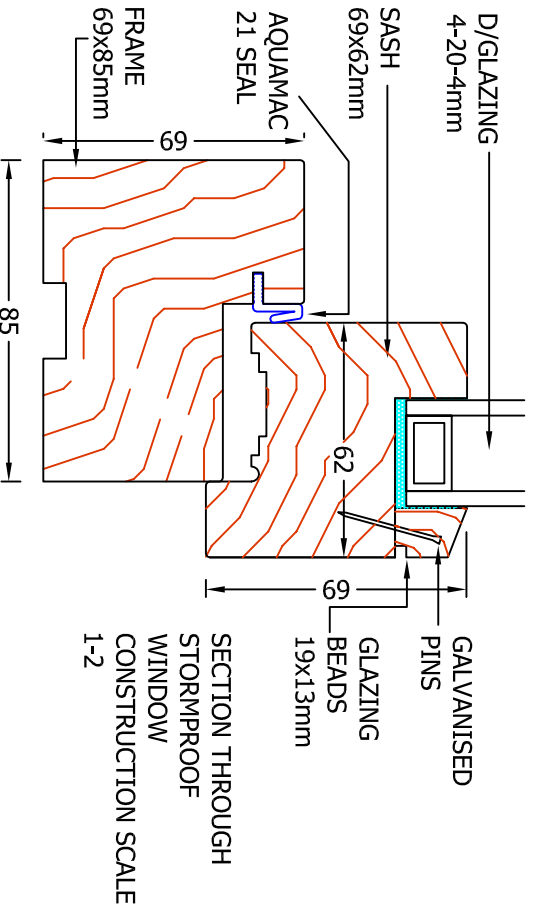

SECTION THROUGH  
STORMPROOF  
WINDOW  
CONSTRUCTION SCALE  
1-2

## FALLOWFIELDS STORMPROOF TIMBER WINDOW SPECIFICATION

- 85 x 69mm Frame  
Softwood - (Or Hardwood)
- 69 x 62mm Sash  
Softwood - (Or Hardwood)
- 4:20:4 Double Glazing, LowE.
- Aquamac 21 Seal
- 2 Point Locking
- Friction Hinges
- Titon Handle - Locking
- Titon Trickle Vent
- Stub cill - Optional
- Drip - Optional
- Mortar Groove - Optional

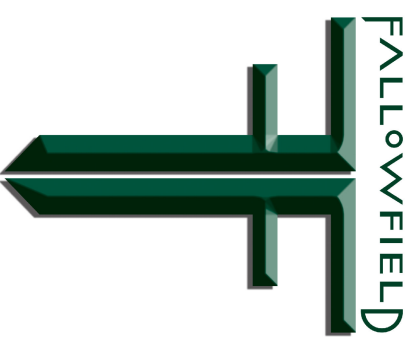

**FALLOWFIELD**  
LTD  
P R O J E C T S

MANUFACTURED JOINERY . CABINET MAKERS  
SHOPFITTING

MIDDLE OF THE MILL  
STAVELEY MILL YARD . BACK LANE, STAVELEY  
NR KENDAL, LAB 9LR CUMBERIA

TEL 01539 822700 FAX 01539 822701

E-MAIL :- [info@fallowfield.co.uk](mailto:info@fallowfield.co.uk)  
WEB PAGE :- [www.fallowfield.co.uk](http://www.fallowfield.co.uk)

CLIENT  
VARIOUS

PROJECT  
FALLOWFIELDS STORMPROOF  
TIMBER WINDOW

DATE MAY 2007

SCALE 1-15/1-1 @ A4

DRAWN BY S RILEY  
REVISION



BRITISH  
WOODWORKING  
FEDERATION