

Fallowfields – Kitemarked Window Specification

85 x 69mm Frame Softwood - Certified (Or Hardwood)
 69 x 62mm Sash Softwood -Certified (Or Hardwood)

4:20:4 Double Glazing, LOWE.

Flexistrip to Double Glazed Unit

Aquamac 21 Seal

2 Point Locking Fixed using s/steel 1 1/4"X7s screws

Nico Extra Bolts Fixed using s/steel 1 1/4"X7s screws (Optional marked (E))

Friction Hinges Fixed using s/steel 1 1/4"X7s screws (Marked (FE))

Titon Handle - Locking Fixed using m5x30mm machine screws (Marked (H))


Titon Vent

Drip

Mortar Groove

Vented Bottom Bead


4"x10s S/steel woodscrews (Marked (S))




BS 644
 KM 511756

* = Security windows fitted with extra bolts & 4 point locking

RECOMMENDED MINIMUM SPECIFICATION FOR A TEST TYPE WINDOW

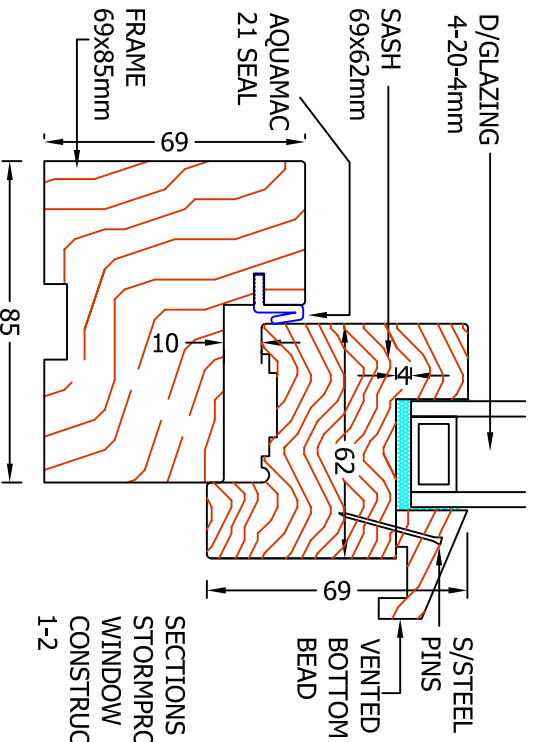

SECTIONS THROUGH STORMPROOF WINDOW CONSTRUCTION SCALE 1-2

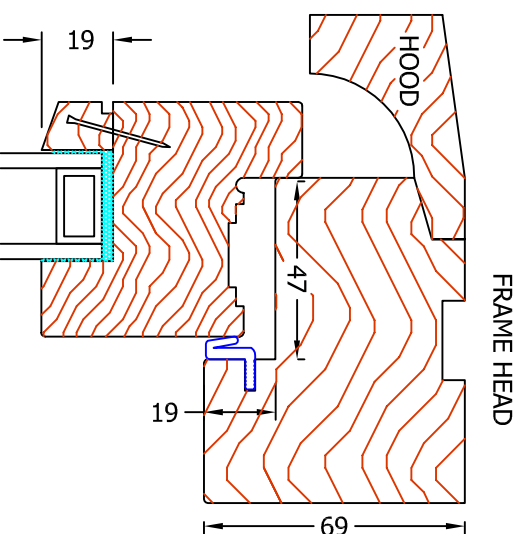

FALLOWFIELD

P R O J E C T S LTD

MANUFACTURED JOINERY . CABINET MAKERS
 SHOPFITTING

MIDDLE OF THE MILL
 STAVELEY MILL YARD . BACK LANE, STAVELEY
 NR KENDAL, LAB 9LR CUMBRIA
 TEL 01539 822700 FAX 01539 822701
 E-MAIL :- info@fallowfield.co.uk
 WEB PAGE :- www.fallowfield.co.uk

CLIENT VARIOUS	PROJECT Fallowfields Kitemarked Window Specification
DATE MAY 2007	SCALE 1-15/1-2 @ A4
DRAWN BY S RILEY	DRAWING No.436-01 REVISION